

QUIKRETE®

CEMENT & CONCRETE PRODUCTS™

PRODUCT GUIDE & PROFIT MANUAL



**HOLT LUMBER
COMPANY**
EVERYTHING TO BUILD WITH
www.holtlumberonline.com
Phone 570-282-4400

Convenient Packaging Enhances the Concrete Purchasing Process

The QUIKRETE® Companies has introduced a new logo and package design for its entire line of products to assist customers in easily identifying the appropriate product for the job at hand. Key elements of the new QUIKRETE® package design are as follows:

- New QUIKRETE® logo
- Enhanced product-in-use illustrations
- Product descriptions featuring product uses, primary ingredients and specifications
- "At-a-Glance" quantity calculators
- Step-by-step application illustrations
- Bi-lingual copy
- Similar design template across all product categories to provide consistency for the customer

In addition to the highlights listed, the new packaging also features improved color coding and enlarged size designations.

ORIGINAL PRODUCTS

include the following products: QUIKRETE® Concrete Mix, Mortar Mix, Sand Mix, Blacktop Patch

Packaging Highlights:

- Product-in-use illustrations on the front of the package help the consumer easily identify the best product for a specific project.
- Product descriptions highlight product uses, primary ingredients and aid in product selection.

COMMERCIAL GRADE PRODUCTS

include the following products:

QUIKRETE® 5000, Mason Mix, Portland Cement, Masonry Cement, Non-Shrink Grouts, Sands, QUIKWALL®, FastSet™ products and Stucco products

Packaging Highlights:

- Category specific logos and white bags.
- Product description includes comprehensive ASTM specifications, illustrations feature contractor or job site oriented product applications to differentiate the line from other QUIKRETE® product categories.

ORIGINAL

Original products form the base of the QUIKRETE® product line.



COMMERCIAL GRADE

Commercial Grade products target our professional customers.



SPECIALTY

Specialty products are a select group of innovative QUIKRETE® products.



RELATED

Related products encompasses QUIKRETE® commercial quality repair products.



Consistent Brand Presentation & Standard Packaging Elements

Allow Consumers to Easily Obtain Information

SPECIALTY PRODUCTS

are a select group of innovative QUIKRETE® products that include:

Fast-Setting Concrete, Concrete Resurfacer, Vinyl Concrete Patcher, Fiber-Reinforced Concrete, and Play Sand.

Packaging Highlights:

- Unique package colors are used to differentiate recognized, high margin QUIKRETE® specialty products.
- The association of these products with established colors is maintained

to assist consumers in identifying the appropriate product for a specific project.

RELATED PRODUCTS encompasses QUIKRETE® commercial quality repair products and various other concrete related items that include:

Quick-Setting Cement, Anchoring Cement, Vinyl Concrete Patcher, Hydraulic Water-Stop Cement, Liquid Cement Colors, Mortar Repair, Concrete Sealer, Gray Concrete Crack Seal, Concrete Repair, Concrete

Bonding Adhesive, Walk Maker® Building Forms

Packaging Highlights:

- Offers product-in-use illustrations and copy including information on expected coverage areas at standard application thicknesses.
- Features and benefits outlined on the packaging enables consumers to successfully identify the product needed to meet project demands.



BI-LINGUAL
Bi-Lingual elements include Product Name & Warning.


PRODUCT DESCRIPTION
Highlights product uses and primary ingredients; aides in product selection.

ILLUSTRATION FRONT PANEL
Product-in-use illustration differentiates products and aids customer in product selection.

CALCULATOR
Easy-to-use quantity calculator helps determine number of bags required at various coverage areas and application depths at-a-glance. English and Metric unit measures.



BAG SIZE
Enlarged size designations.

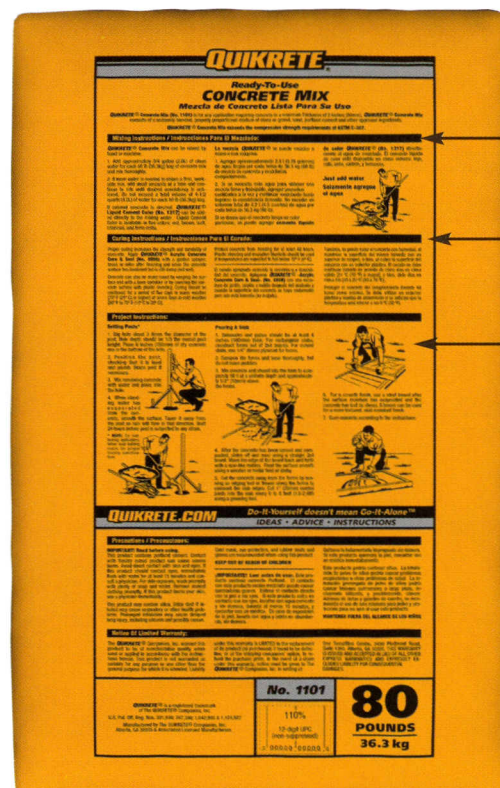

BI-LINGUAL
Bi-Lingual elements include Mixing Instructions, Curing Instructions, and Warning.

APPLICATION ILLUSTRATIONS
Easy to understand step-by-step illustrations feature important application steps and reduce space required for Spanish translation.

INSTRUCTION COPY
Copy format has been designed to be consistent throughout entire product line. Features efficient step-by-step instructions and cross sells relevant QUIKRETE® products.

A Comprehensive National Consumer Advertising Program Creates Brand Awareness

DELIVERING THE MESSAGE

The use of national print and broadcast advertising increases brand awareness with homeowners and professionals, resulting in more customers for dealers. **The QUIKRETE® brand is reinforced through the use of creative print, radio and television spots** that capture the attention of the consumer and focus it on the QUIKRETE® brand name and project-driven products. This powerful message is delivered on national cable television programming such as ESPN, ESPN-2, FOX Sports Net, The Learning Channel (TLC), and Home & Garden Television (HGTV). Projects using QUIKRETE® products are also featured on many popular home shows like Home Matters and Your New House. Radio spots are featured on Performance Radio Network (PRN), the Gary Sullivan Show and Mobile Racing Network (MRN). This broadcast schedule is supported with print ads in such popular DIY magazines as This

Old House, Popular Mechanics, Family Handyman, Masonry and Concrete Construction and Sports Illustrated. QUIKRETE® also reaches the professional consumer through ads in publications like Builder, Remodeling, and The Journal of Light Construction. National advertising is supplemented with local newspaper coverage highlighting concrete-related projects.

WWW.QUIKRETE.COM

The QUIKRETE® website contains information for both the do-it-yourselfer and the professional contractor. The homeowner will find an extensive list of projects with one feature project spotlighted each month. This section will show you how to plan the job and how to complete it successfully. Also in this location you will find sections of FAQ's, Glossary

of Terms, The "How To" Book and a Product Locator. Professional contractors will find a collection of product and construction related information which caters to builders, contractors, architects and material suppliers. This link includes FAQ's, Spec Data Sheets, MSDS Documents and calendar of events. All MSDS and Spec Data sheets are available in PDF format and run with Adobe Acrobat Reader.

Print ads appear in popular DIY and professional magazines.



Creative television spots capture the attention of the consumer.



The QUIKRETE® Brand is reinforced through the use of creative print advertising.



At The **QUIKRETE® Technical Center, New Products**
are Researched and Developed

QUALITY AND INNOVATION

QUIKRETE® Technical Center Innovation & Product Development...

Here new products are researched and developed. Product stress and durability tests are a routine part of QUIKRETE® product quality assurance. Recent products that have been developed and launched are the Concrete Resurfacer product, the line of FastSet™ products and the the most recent line of 5.5 oz. Repair Tubes. Production line samples are constantly

evaluated to assure consistent quality among QUIKRETE® manufacturing facilities throughout the country. In addition, QUIKRETE® designs and produces its own patented machinery to measure, blend and package its products.


Consumer Research

At QUIKRETE® we conduct extensive consumer research to identify brand preference, product demands and industry trends to better service our customers.

Consumer Help Line

Questions? Call 1-800-282-5828. QUIKRETE® is the only national concrete manufacturer to offer this service. Consumers can ask for advice on do-it-yourself concrete projects, inquire about specific QUIKRETE® products, order product literature and find out where the nearest QUIKRETE® dealer is located.


The website contains information for the do-it-yourself and professional.

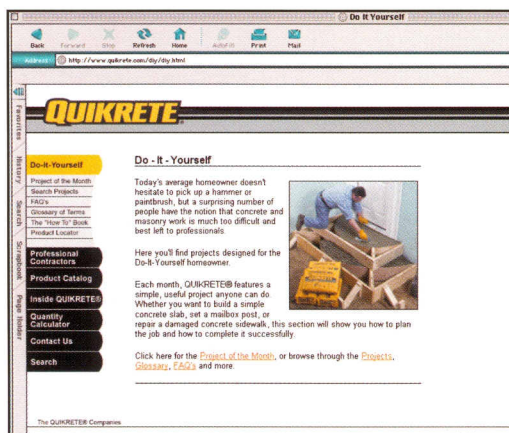

Product strength and durability tests are a routine part of QUIKRETE® product quality assurance.



Questions? Call 1-800-282-5828 for the QUIKRETE® Consumer Help Line.

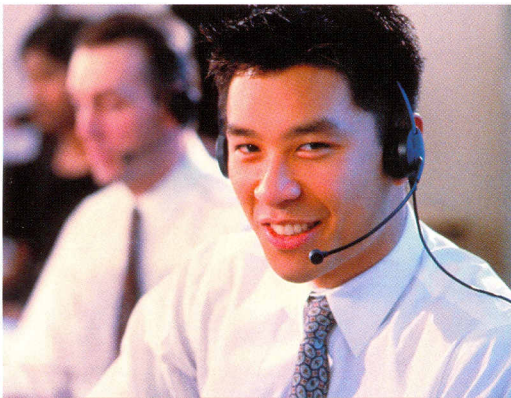

Award Winning Point-Of-Sale Merchandising

TOTAL PROGRAM SUPPORT

QUIKRETE®'S award-winning, point-of-sale merchandising support is unequalled in the industry.

Innovative, new 4 color shelf talkers and signs feature a project-sell focus that makes shopping for the right product easier than ever.

Innovative new point of purchase merchandising

features a project-sell focus that makes shopping for the right product easier than ever. Shelf talkers and overhead signs describe projects, feature product packages for easy identification and include information on how much product is needed for a particular job.

An array of banners, signs, brochures and training tapes are available to

provide the most complete product and project information.

Personnel Training and Dealer Support

is another key component of the QUIKRETE® program. The extensive QUIKRETE® sales support team provides on-going product knowledge training to our vast dealer network. We work closely with dealers to ensure that their personnel are properly trained to provide customers with the best advice possible for particular projects. The QUIKRETE® sales support staff is always available to participate in consumer clinics for the do-it-yourselfer and contractor nights for the professional.

QUIKRETE® Merchandise When You Need It Policy

The success of QUIKRETE® is due in part to the maintenance of adequate inventories "at the ready" to meet special demands like those created by sales events and seasonal changes. QUIKRETE® ensures accurate and on-time delivery throughout the country. **The QUIKRETE® Network of over 75 manufacturing locations** allows us to ship on demand with service to all 50 states, as well as Puerto Rico and Canada. QUIKRETE® is also set up to offer EDI ordering which makes processing orders easy and convenient.

An array of banners, signs, brochures and training tapes are available.



QUIKRETE®

CONCRETE MIXES



Concrete Mix

Original 4000 psi average compressive strength blend of portland cement, sand, gravel or stone, and other approved ingredients. Just add water. Use for any general concrete work.

Use For:

- Setting Posts
- Footings
- Sidewalks
- Curbs
- Floors
- Steps
- Patios



Item Number	Package Size	Metric	Quantity
1101-10	10lb. bag	4.5 kg	6/bale
1101-40	40lb. bag	18.1 kg	80/pallet
1101-60	60lb. bag	27.2 kg	56/pallet
1101-80	80lb. bag	36.3 kg	42/pallet

Fast-Setting Concrete Mix

A special blend of fast-setting cements, sand and gravel designed to set hard in approximately 20-40 minutes. Sets posts without mixing. Pour dry mix into hole and soak with water.

Use For Setting:

- Fence posts
- Mailbox posts
- Lamp posts
- Swing sets

Use For Building:

- Steps
- Sidewalks
- Air conditioner pads



Item Number	Package Size	Metric	Quantity
1004-50	50lb. bag	22.7 kg	64/pallet

QUIKRETE® 5000 Concrete Mix

Commercial Grade blend of portland cement, sand, gravel and other approved ingredients specially designed for higher early strength. Achieves 5000 psi after 28 days. Ideal for cold weather application.

Use For:

- Driveway aprons
- Deck supports
- Concrete projects 2" thick or more that require high strength
- Patios
- Sign footings



Item Number	Package Size	Metric	Quantity
1007-01	60lb. bag	27.2 kg	56/pallet
1007-00	80lb. bag	36.3 kg	42/pallet

Fiber-Reinforced Concrete Mix

Commercial Grade blend of portland cement, sand, gravel & special reinforcing fibers to reduce shrinkage cracks and improve impact resistance. Just add water. Ideal for use with Walk Maker™ Projects.

Use For Building:

- Walkways
- Garage/shed floors
- Patios
- Steps



Item Number	Package Size	Metric	Quantity
1006-60	60lb. bag	27.2 kg	56/pallet
1006-60	60lb. bag	27.2 kg	35/short pallet

Sand/Topping Mix

Consists of a uniformly blended mixture of portland cement, graded sand and other approved ingredients.

Use For:

- Repairing and topping damaged concrete surfaces less than 2" thick
- As a base for laying flagstone and paving bricks



Item Number	Package Size	Metric	Quantity
1103-10	10lb. bag	4.5 kg	6/bale
1103-40	40lb. bag	18.1 kg	80/pallet
1103-60	60lb. bag	27.2 kg	56/pallet
1103-80	80lb. bag	36.3 kg	42/pallet

QUIKRETE®

MORTAR MIXES



Mortar Mix

A blend of masonry cement and graded sand designed to meet ASTM C 270 for Type N Mortar. Just add water.

Use For Construction and Repair of Brick, Block and Stone:

- Barbecues
- Pillars
- Walls
- Tuck pointing mortar joints
- Planters



Item Number	Package Size	Metric	Quantity
1102-10	10lb. bag	4.5 kg	6/bale
1102-40	40lb. bag	18.1 kg	80/pallet
1102-60	60lb. bag	27.2 kg	56/pallet
1102-80	80lb. bag	36.3 kg	42/pallet

Mason Mix

High strength, contractor grade, pre-blended mortar mix. Mason Mix contains properly graded masonry sand and requires only the addition of water. Exceeds the performance requirements of ASTM C 270 for Type S mortar.

Use For Structural Masonry Applications

Both Above and Below Grade:

- Walls
- Brick/stone veneers
- Columns
- Tuck pointing



Item Number	Package Size	Metric	Quantity
1136-05	60lb. bag Type N	27.2 kg	56/pallet
1136-86	80lb. bag Type N	36.3 kg	42/pallet
1136-00	60lb. bag Type S	27.2 kg	56/pallet
1136-80	80lb. bag Type S	36.3 kg	42/pallet

Colored Mason Mix

High strength, contractor grade, pre-blended mortar mix. Colored Mason Mix contains properly graded masonry sand and color pigment. Exceeds the performance requirements of ASTM C 270 for Type S mortar. *Contact your local representative for exact color availability.*

Use For Structural Masonry Applications

Both Above and Below Grade:

- Walls
- Brick/stone veneers
- Tuck pointing
- Columns



Item Number	Package Size	Metric	Quantity
1136-71	80lb. bag Type S	36.3 kg	42/pallet
1136-72	80lb. bag Type N	36.3 kg	42/pallet

Glass Block Mortar

Specifically formulated blend of white sand, white cement, hydrated lime and other water proof additives. Exceeds the performance requirements of ASTM C 270 for Type S mortar. Just add water.

Use For:

- Laying glass block for interior and exterior walls
- Laying brick, block or tile where white mortar is desired



Item Number	Package Size	Metric	Quantity
1610-00	50lb. bag	22.7 kg	63/pallet

Core Fill Grout

A properly proportioned mixture of portland cement, graded sand, and other ingredients designed to provide a flowable grout, requiring only the addition of water. Complies with ASTM C 476. Available in Fine and Coarse.

Use For:

- Filling masonry block cores
- Pumped or poured applications
- When grout space is smaller than 4" (100mm) in either direction



Item Number	Package Size	Metric	Quantity
1585-07	80lb. bag Coarse	36.3 kg	42/pallet
1585-08	80lb. bag Fine	36.3 kg	42/pallet

Roof Tile Mortar – FL15

Contractor grade mortar that exceeds the performance requirements of ASTM C 270 for Type M mortar.

Use For:

- Setting flat and low profile clay, cement and other roof tile



Item Number	Package Size	Metric	Quantity
1140-80	80lb. bag	36.3 kg	42/pallet



Portland Cement

Complies with current ASTM C 150 and Federal Specifications for portland cement. Can be mixed with aggregate and other ingredients to make concrete mix, mortar mix and base coat stucco. Available in Type I, Type 1/II, Type II and Type III.

To make Concrete Mix:

- 3 Parts Gravel • 2 Parts All-Purpose Sand
- 1 Part Portland Cement (by volume)

To make Type S Mortar Mix:

- 3-1/2 to 4-1/2 Parts Masonry Sand
- 1/2 Part Hydrated Lime
- 1 Part Portland Cement (by volume)



Item Number	Package Size	Metric	Quantity
1124-31	31lb. bag	14.1 kg	100/pallet
1124-47	47lb. bag	21.3 kg	63/pallet
1124-94	94lb. bag	42.6 kg	35/pallet
1124-94	92.6lb. bag	42 kg	35/pallet

Masonry Cement

Complies with current ASTM C 91 and Federal Specifications for masonry cement.

To make Type N Mortar Mix:

- 3 Parts Masonry Sand
- 1 Part Type N Masonry Cement (by volume)

To make Type S Mortar Mix:

- 3 Parts Masonry Sand
- 1 Part Type S Masonry Cement (by volume)



Item Number	Package Size	Metric	Quantity
1125-71	70lb. bag Type S	31.7 kg	40/pallet
1125-70	70lb. bag Type N	31.7 kg	40/pallet
1125-72	70lb. bag Type M	31.7 kg	40/pallet

Portland-Lime Cement

Blend of portland cement and hydrated lime. Available Regionally.

To make Type S Mortar Mix:

- 2-1/2 to 3 Parts Masonry Sand
- 1 Part Portland-Lime Cement (by volume)




Item Number	Package Size	Metric	Quantity
1125-21	70lb. bag	31.7 kg	40/pallet

Plastic Cement

Complies with ASTM C 1328 Type M and S. Blended cement specifically designed for use with plaster sand to make Base Coat Stucco. Available Regionally.

To make Scratch and Base Coat Stucco Mix:

- 3 to 4 Parts Plaster Sand
- 1 Part Plastic Cement (by volume)

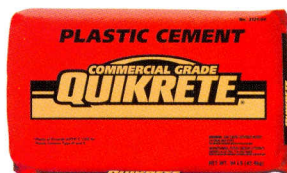

Item Number	Package Size	Metric	Quantity
2121-94	94lb. bag	42.6 kg	35/pallet

CONSTRUCTION PRODUCTS



Non-Shrink Precision Grout

High strength, non-metallic, non-shrink grout designed for precision grouting and general construction applications. Can be mixed to a plastic, flowable or fluid consistency. Complies with ASTM C 1107 and Army Corp of Engineers CRD 621.

Use For:

- Grouting heavy equipment, pre-cast concrete, bearing plates, steel columns and anchoring applications

Compressive Strength at 28 Days

Plastic	14000 psi	96.5 MPa
Flowable	12000 psi	86.2 MPa
Fluid	8000 psi	55.2 MPa



Item Number	Package Size	Metric	Quantity
1585-00	50lb. bag	22.7 kg	64/pallet
1585-00	50lb. bag	22.7 kg	35/short pallet

Non-Shrink General Purpose Grout

High strength, non-metallic portland cement based material including expansive additives. Can be mixed to a plastic, flowable or fluid consistency. Complies with ASTM C 1107 and Army Corp of Engineers CRD 621.

Use For:

- Grouting and general construction applications

Compressive Strength at 28 Days

Plastic	10000 psi	68.9 MPa
Flowable	9000 psi	62.1 MPa
Fluid	8000 psi	55.2 MPa



Item Number	Package Size	Metric	Quantity
1585-01	50lb. bag	22.7 kg	64/pallet

Self-Leveling Floor Resurfacer

Self-finishing interior floor topping and underlayment specially formulated to produce a smooth surface ready for the installation of ceramic tile, resilient flooring or other finishes. Exceeds 1000 psi (6.9 MPa) in 7 days and 2000 psi (13.8 MPa) in 28 days. No troweling required.

Use:

- Over new concrete floors and pre-cast slabs with unacceptable finishes
- Resurfacing existing concrete floors with damaged finishes



Item Number	Package Size	Metric	Quantity
1249-50	50lb. bag	22.7 kg	64/pallet

Fast-Setting Self-Leveling Floor Resurfacer

Self-finishing interior floor topping and underlayment specially formulated to produce a smooth surface ready for the installation of ceramic tile, resilient flooring and other finishes. Exceeds 1800 psi (12.4 MPa) in 24 hours, 4000 psi (27.6 MPa) in 7 days and 5500 psi (37.9 MPa) in 28 days. No troweling required.

Use:

- As a wear surface for light industrial floors
- Over new concrete floors and precast slabs with unacceptable finishes
- Resurfacing existing concrete floors with damaged finishes



Item Number	Package Size	Metric	Quantity
1249-51	50lb. bag	22.7 kg	64/pallet

CONSTRUCTION & WATERPROOFING PRODUCTS



Fast-Setting Underlayment

A rapid hardening, high strength, non-shrink blend of gypsum cement and graded sand designed to level concrete and wood floors. Trowel applied.

Use For:

- Interior concrete and wood floors prior to the installation of ceramic tile, resilient flooring, carpet and other floor coverings



Item Number	Package Size	Metric	Quantity
1248-25	25lb. bag	11.3 kg	100/pallet
1248-25	25b. bag	11.3 kg	25/short pallet

Rapid Road Repair

Specially formulated, alkali resistant, fiberglass reinforced concrete repair mortar used for structural concrete repair.

Use For Repairing:

- Highways
- Runways
- Driveways
- Bridge decks
- Parking garages
- Concrete footings



Item Number	Package Size	Metric	Quantity
1242-51	50lb. bag	22.7 kg	64/pallet*

Hydraulic Water-Stop Cement

Rapid setting, high strength repair material designed to plug leaks instantly in concrete and masonry. Sets in 3-5 minutes and can be used above and below grade.

Use For:

- Blocking running water or leaks in cracked masonry or concrete surfaces
- Can be used on swimming pools, foundations and for sealing around concrete pipe



Item Number	Package Size	Metric	Quantity
1126-11	10lb. pail	4.5 kg	4/case
1126-20	20lb. pail	9.1 kg	60/pallet
1126-50	50lb. pail	22.7 kg	36/pallet

Heavy Duty Masonry Coating

A powdered mixture of portland cement, waterproofing agents and sand used to seal and beautify concrete, block, brick, stucco, and stone walls. Can be used in both interior and exterior applications both above grade and below. Available in white and gray.

Use For:

- Basement walls
- Retaining walls
- Ponds
- Swimming pools



Item Number	Package Size	Metric	Quantity
1301-40	40lb. bag	18.1 kg	63/pallet
2401-20	20lb. pail White	9.1 kg	60/pallet
1312-40	40lb. bag	18.1 kg	63/pallet
2402-20	20lb. pail Gray	9.1 kg	60/pallet

FASTSET™ PRODUCTS



FastSet™ Concrete Mix

A special blend of cement with specifically graded fine and coarse aggregates. Sets in 20-30 minutes allowing time for mixing, pouring and finishing. Use at any thickness from 1-1/2" to 24". Exceeds the requirements of ASTM C 928 R-3.

Use to Build or Repair:

- Street repairs
- Concrete parking lots
- Highways
- Concrete floors
- Bridge decks
- Sidewalks



Item Number	Package Size	Metric	Quantity
1004-51	70lb. bag	31.7 kg	49/pallet

Compressive Strength ASTM C39

3 Hours	3000 psi	20.7 MPa
24 Hours	5000 psi	34.5 MPa
7 Days	6000 psi	41.3 MPa
28 Days	7000 psi	48.3 MPa

FastSet™ Repair Mortar

Specifically formulated to make structural repairs to any concrete, masonry or stucco surface. Low sag formula makes it ideal for vertical and overhead repairs. 20-30 minute working time and unique properties allow sculpting of the material during placement. Exceeds ASTM C 928 R-2.

Use for Repairing:

- Pre-stress panels
- Retaining walls
- Loading docks
- Bridge columns
- Tunnels
- Curbs/steps



Item Number	Package Size	Metric	Quantity
1241-60	60lb. bag	27.2 kg	56/pallet
1241-20	20lb. pail	9.1 kg	60/pallet

Compressive Strength ASTM C39

3 Hours	2000 psi	13.8 MPa
24 Hours	4000 psi	27.6 MPa
7 Days	5000 psi	34.5 MPa
28 Days	6000 psi	41.4 MPa

FastSet™ Non-Shrink Grout

Designed for structural concrete repairs from 1/4" to 24" deep. Features a 30 minute set time, non shrink characteristics and rapid strength gain. Can be mixed to a plastic, flowable or fluid consistency. Exceeds ASTM C 928 R-3 and ASTM C 1107.

Use for Anchoring and Grouting:

- Anchor bolts
- Pre-cast concrete keyways
- Steel column bases
- Floor leveling
- Bearing plates



Item Number	Package Size	Metric	Quantity
1585-09	60lb. bag	27.2 kg	56/pallet
1585-20	20lb. pail	9.1 kg	60/pallet

Compressive Strength ASTM C109

	Fluid	Flowable	Plastic
3 Hours	2000 psi 13.8 MPa	2500 psi 17.2 MPa	3000 psi 20.7 MPa
24 Hours	4000 psi 27.6 MPa	4500 psi 31.0 MPa	5000 psi 34.5 MPa
7 Days	5000 psi 34.5 MPa	5500 psi 37.9 MPa	6000 psi 41.3 MPa
28 Days	6500 psi 44.8 MPa	7500 psi 51.7 MPa	8000 psi 55.1 MPa

FastSet™ DOT Mix

Specially formulated for use in structural concrete repair, bridge decks, roadways and parking deck applications from 1/2" to 24" thick (13-600mm). Exceeds the requirements of ASTM C-928 R-3 for concrete repair materials. Can be extended with up to 25lbs (11.3 kg) of 3/8" (10 mm) of stone or gravel with a top size of up to 1/2" (12 mm) for patches over 2" (50mm) thick. Exceeds DOT region 3 requirements for exposure to de-icing chemicals

Use for Anchoring and Grouting:

- Structural concrete repair
- Bridge decks
- Road ways
- Parking deck applications



Item Number	Package Size	Metric	Quantity
1585-09	55lb. bag	25.0 kg	56/pallet

Compressive Strength ASTM C109 Modified

Age	ASTM C928 Specification	Typical Values
1.5 Hours		3000 psi (20.7 MPa)
3 Hours	3000 (20.7 MPa)	4500 psi (31.0 MPa)
24 Hours	5000 (34.5 MPa)	6500 psi (44.8 MPa)
7 Days	5000 (34.5 MPa)	8000 psi (55.1 MPa)
28 Days		10,000 psi (68.9 MPa)

STUCCO PRODUCTS



One Coat Fiberglass Reinforced Stucco

An alkali resistant, fiberglass reinforced, portland cement based stucco designed for use in one-coat stucco applications. Available in a sanded version requiring only the addition of water or a concentrated version which requires the addition of clean plaster sand and water.

Use For:

- One hour fire rating over plywood or OSB and EPS foam
- Crack resistant formula
- Extended board life
- Superior workability



Item Number	Package Size	Metric	Quantity
1200-80	80lb. bag Sanded	36.3 kg	42/pallet
1216-93	90lb. bag Concentrated	40.8 kg	35/pallet

Base Coat Stucco

A portland cement based stucco used for construction and repair of stucco walls. Complies with ASTM C 926 requirements for cement based plaster.

Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application



Item Number	Package Size	Metric	Quantity
1139-81	60lb. bag	27.2 kg	56/pallet
1139-80	80lb. bag	36.3 kg	42/pallet

Base Coat Stucco with Water-Stop

A portland cement based exterior stucco, with Water-Stop additive, used for the construction and repair of stucco walls. The Water-Stop waterproofing additive prevents moisture penetration from wind driven rain. Complies with ASTM C 926 requirements for cement based plaster.

Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application



Item Number	Package Size	Metric	Quantity
1139-89	80lb. bag	36.3 kg	42/pallet

Finish Coat Stucco

Portland cement based stucco finishing plaster designed for use as the color and texture coat over portland cement base coat or QUIKRETE® Fiberglass Reinforced Stucco. Requires only the addition of water. Available in white or gray. Color can be added using QUIKRETE® Stucco & Mortar Color. 90lb. (40.5 kg) Finish Coat Stucco Available Regionally

Use For:

- A decorative color and texture finish coat for stucco
- New construction and renovation application



Item Number	Package Size	Metric	Quantity
1201-80	80lb. bag	36.3 kg	42/pallet
1201-80	80lb. bag	36.3 kg	24/short pallet
1201-91	90lb. bag White	40.8 kg	35/pallet
1202-80	80lb. bag	36.3 kg	42/pallet
1202-80	80lb. bag	36.3 kg	24/short pallet
1201-92	90lb. bag Gray	40.8 kg	35/pallet

QUIKWALL® Surface Bonding Cement

An alkali resistant, fiberglass reinforced, portland cement based surface bonding cement used for construction of dry-stack (without mortar) cement block walls. Add color with QUIKRETE® Stucco & Mortar Color.

Use For:

- Waterproofing and strengthening block walls without mortar
- Rehabilitating existing walls with a water-resistant and decorative coating



Item Number	Package Size	Metric	Quantity
1230-50	50lb. bag	22.7 kg	64/pallet
1230-50	50lb. bag White	22.7 kg	35/short pallet
1231-50	50lb. bag	22.7 kg	64/pallet
1231-51	50lb. bag Gray	22.7 kg	35/short pallet
1220-50	50lb. bag Unsanded	22.7 kg	63/pallet

Pre-Mixed Stucco Patch

Ready-to-use acrylic latex formula for making repairs to cracks, breaks and holes up to 1/4" thick in stucco surfaces

- Dries to a durable and flexible finish
- Sanded formula blends with the texture of surrounding stucco



Item Number	Package Size	Metric	Quantity
8650-32	1qt. pail	0.95L	24/case

CONCRETE REPAIR PRODUCTS



Concrete Resurfacer

A special blend of portland cement, sand, polymer modifiers and other additives. Designed to provide a shrinkage compensated repair material for making thin repairs to sound concrete in need of surface renewal. Can be squeegee, trowel or brush applied.

Use For:

- Sidewalks
- Driveways
- Floors
- Pool decks
- Patios
- Curbs
- Concrete floors
- Parking decks



Item Number	Package Size	Metric	Quantity
1131-20	20lb. pail	9.1 kg	60/pallet
1131-40	40lb. bag	18.1 kg	64/pallet
1131-40	40lb. bag	18.1 kg	35/short pallet
1131-80	80lb. bag	36.3 kg	42/pallet

Vinyl Concrete Patcher

Multi-purpose concrete repair material with strong adhesive properties. Trowels to a feather edge of 1/16". Made of a special blend of exterior grade vinyl resin, fine sand, and portland cement. Just add water. Available in gray and white.

Use For:

- Making smooth repairs to cracked or chipped concrete floors, sidewalks or steps



Item Number	Package Size	Metric	Quantity
1133-11	10lb. pail	4.5 kg	4/case
1133-20	20lb. pail	9.1 kg	60/pallet
1133-40	40lb. bag	18.1 kg	64/pallet
1133-40	40lb. bag	18.1 kg	35/short pallet

Quick-Setting Cement

Specially formulated to set in approximately 10–15 minutes. Can be molded or sculpted into place.

Use For:

- Making concrete repairs where rapid setting is required
- Ideal for repairing broken edges of concrete steps and curbs



Item Number	Package Size	Metric	Quantity
1240-11	10lb. pail	4.5 kg	4/case
1240-20	20lb. pail	9.1 kg	60/pallet
1240-50	50lb. bag	22.7 kg	64/pallet

Anchoring Cement

A pourable cement that develops strength greater than concrete. Expands as it hardens and sets in 10-30 minutes. Just add water.

Use For:

- Setting bolts, handrails, or anything metal to be anchored in concrete
- Ideal for repairing loose wrought iron railings
- Can be used for interior or exterior applications



Item Number	Package Size	Metric	Quantity
1245-11	10lb. pail	4.5 kg	4/case
1245-20	20lb. pail	9.1 kg	60/pallet
1245-50	50lb. pail	22.7 kg	36/pallet

Concrete Repair

A sanded acrylic formula that is weather resistant, has excellent adhesion and remains flexible. Matches the color and texture of concrete surfaces.


Use For:

- Filling and sealing cracks in concrete
- Vertical or horizontal applications



Item Number	Package Size	Metric	Quantity
8620-13	5.5 oz. tube	163 ml	12/case

CRACK SEALERS CAULK TUBES

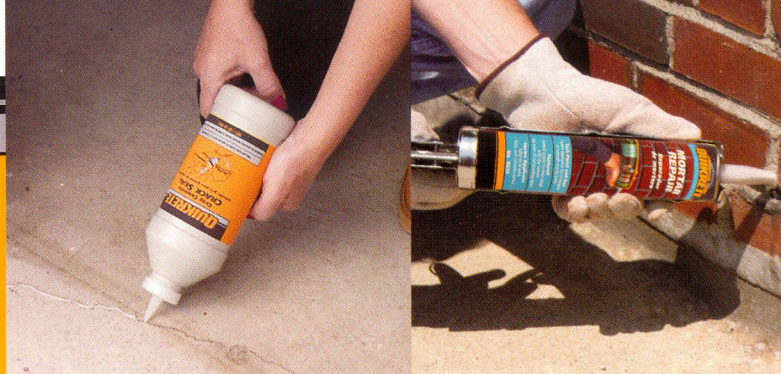

Gray Concrete Crack Seal

A uniformly blended latex emulsion, specially designed to adhere to all concrete surfaces. No mixing is required. Just pour from the bottle. Blends in with the natural color of concrete.

Use For:

- Repairing cracks in concrete sidewalks, patios and driveways



Item Number	Package Size	Metric	Quantity
8640-00	1 qt. bottle	.095 L	12/case
8640-01	1 gal. bottle	3.8 L	4/case

Concrete Repair

A weather-resistant, tough and flexible crack-filler and sealer. Helps prevent water and ice damage to masonry surfaces. Dries to a textured finish to blend with surface. Apply with standard caulking gun.

Use For:

- Repairing cracks in concrete, masonry and stucco
- Ideal for vertical surfaces



Item Number	Package Size	Metric	Quantity
8620-10	10 oz. tube	296 ml	12/case

Mortar Repair

A sanded acrylic formula that adheres to brick, block, stone and concrete surfaces. Texture and color blends with the surrounding mortar. The square applicator tip is designed to smooth mortar joints.

Use For:

- Tuck-pointing and sealing mortar joints



Item Number	Package Size	Metric	Quantity
8620-09	10 oz. tube	296 ml	12/case

Stucco Repair

Fills and seals cracks in stucco up to 1/2" (12mm) wide. Weather resistant formula provides excellent adhesion and flexibility. Sanded acrylic formula blends with the texture of the surrounding stucco surface.

Use For:

- Vertical or horizontal stucco repair applications



Item Number	Package Size	Metric	Quantity
8650-10	10 oz. tube	296 ml	12/case

Concrete Crack Seal

Ready-to-use formula specially designed to bond to all concrete surfaces. Fills and seals cracks up to 1/2" (12mm) wide. Gray color blends in with the natural color of concrete.

Use For:

- Repairing cracks in concrete driveways, sidewalks, patios, steps, etc.



Item Number	Package Size	Metric	Quantity
8640-15	5.5 oz. tube	163 ml	12/case

5.5 oz. SQUEEZE CAULK TUBES



Concrete Crack Seal

Ready-to-use formula specially designed to bond to all concrete surfaces. Fills and seals cracks up to 1/2" (12mm) wide. Gray color blends in with the natural color of concrete.

Use For:

- Repairing cracks in concrete driveways, sidewalks, patios, steps, etc.

Item Number	Package Size	Metric	Quantity
8640-15	5.5 oz. tube	163 ml	12/case

Concrete Repair

A sanded acrylic formula that is weather resistant, has excellent adhesion and remains flexible. Matches the color and texture of concrete surfaces.

Use For:

- Filling and sealing cracks in concrete
- Vertical or horizontal applications

Item Number	Package Size	Metric	Quantity
8620-13	5.5 oz. tube	163 ml	12/case

Mortar Repair

A sanded acrylic formula that adheres to brick, block, stone and concrete surfaces and blends with the texture and color of surrounding mortar.

Use For:

- Tuck-pointing and sealing mortar joints

Item Number	Package Size	Metric	Quantity
8620-05	5.5 oz. tube	163 ml	12/case

Stucco Crack Repair

Fills and seals cracks in stucco up to 1/2" (12mm) wide. Weather resistant formula provides excellent adhesion and flexibility. Sanded acrylic formula blends with the texture of the surrounding stucco surface.

Use For:

- Vertical or horizontal stucco repair applications

Item Number	Package Size	Metric	Quantity
8650-05	5.5 oz. tube	163 ml	12/case

Blacktop Repair

A sanded acrylic formula that fills and seals cracks in blacktop surfaces. Color and texture blends with the surrounding blacktop. Weather resistant formula remains flexible and adheres to both asphalt and concrete.

Use For:

- Filling and sealing cracks in blacktop surfaces

Item Number	Package Size	Metric	Quantity
8630-05	5.5 oz. tube	163 ml	12/case



POLYURETHANE SEALANTS & ADHESIVE

Polyurethane Self-Leveling Sealant

A high performance, construction grade, polyurethane sealant, used for sealing cracks and joints in horizontal concrete surfaces. Self leveling formula provides superior adhesion, flexibility and durability. Meets ASTM C 920 Type S, Grade P, Class 25. Available in gray or sandstone.

Use For:

- Sealing expansion joints in concrete slabs
- Sealing cracks in concrete floors, driveways, patios, steps, basements and pool decks



Item Number	Package Size	Metric	Quantity
8660-10	10.1 oz. tube Gray	300 ml	12/case
8660-30	29 oz. tube Gray	858 ml	6/case
8660-31	29 oz. tube Sandstone	858 ml	6/case

Polyurethane Non-Sag Sealant

A high performance, construction grade polyurethane sealant designed for vertical and overhead surfaces. The non-sag formula provides superior adhesion and flexibility. Meets ASTM C 920, Type S, Grade NS.

Use For:

- Expansion joints in concrete wall panels and stucco walls
- Sealing around window and door openings
- Sealing cracks in concrete, stucco and masonry surfaces



Item Number	Package Size	Metric	Quantity
8660-11	10.1 oz. tube	300 ml	12/case

Polyurethane Construction Adhesive

A high performance, construction grade adhesive designed for permanently bonding concrete, brick, marble, stone, wood, glass, aluminum, steel, PVC and tile.

Use For:


- Repairing broken concrete
- Bonding retaining wall block and caps



Item Number	Package Size	Metric	Quantity
9902-10	10.1 oz. tube	300 ml	12/case

Backer Rod

Foam rope used to partially fill large cracks, gaps and joints before applying sealant. Use for horizontal and vertical applications. Available in 3/4", 20 foot length diameter.



Item Number	Package Size	Metric	Quantity
6917-42	3/4" diameter 20' long	25.4mm x 6m	12/case

**HOLT LUMBER
COMPANY**
EVERYTHING TO BUILD WITH
www.holtlumberonline.com
Phone 570-282-4400

SEALERS & ADDITIVES



Concrete Bonding Adhesive

Permanently bonds new concrete, plaster, and stucco to existing concrete, plaster or stucco. Eliminates the need for roughing the surface before the application. Exceeds the performance requirements of ASTM C 1059 Type I and II.

Use For:

- Bonding applications on concrete overlays 1" or thicker
- Interior and exterior applications



Item Number	Package Size	Metric	Quantity
9902-14	1 qt. bottle	0.95 L	12/case
9902-01	1 gal. bottle	3.8 L	4/case
9902-05	5 gal. pail	18.9 L	36/pallet

Concrete Acrylic Fortifier

Acrylic resin admixture designed to enhance bonding and water resistance of concrete patching materials, stucco, surface bonding cement, thin-set mortars and tile grouts. Exceeds the requirements of ASTM C 1438

Use To:

- Improve bonding to existing surfaces
- Eliminate moist curing in most circumstances
- Reduce permeability



Item Number	Package Size	Metric	Quantity
8610-14	1 qt. bottle	0.95 L	12/case
8610-01	1 gal. bottle	3.8 L	4/case
8610-05	5 gal. pail	18.9 L	36/pallet

Liquid Cement Color

Mix with water and then add to dry concrete mix. One bottle will mix with two 80lb. or 60lb. bags of Concrete Mix. Available in red, brown, buff, charcoal and terra cotta.

Use For:

- Adding color to Walk Maker™ projects
- Adding color to any concrete, mortar, sand topping or stucco project
- Provides permanent integral color



Item Number	Package Size	Metric	Quantity
1317-00	10 oz. bottle Charcoal	296 ml	12/case
1317-01	10 oz. bottle Brown	296 ml	12/case
1317-02	10 oz. bottle Buff	296 ml	12/case
1317-03	10 oz. bottle Red	296 ml	12/case
1317-04	10 oz. bottle Terra Cotta	296 ml	12/case

Stucco & Mortar Color

Adds a decorative touch to stucco and mortar projects. Add to mixing water and then mix colored water with dry mix. Available in 20 standard colors.

Use With:

- QUIKRETE® Finish Coat Stucco, Mason Mix, Heavy Duty Masonry Coating, Surface Bonding Cement and Fiberglass Reinforced Stucco
- Provides permanent integral color



Item Number	Package Size	Metric	Quantity
varies by color	10 oz. bottle	296 ml	12/case

SEALERS & ADDITIVES



Concrete & Asphalt Cleaner - Concentrate

A multi-purpose cleaner that is safe to use on any hard surface where water can be used. Use prior to any repair project to achieve the strongest bond. Non-toxic, non-flammable and contains no acid.

Use For:

- Removing soil, grease, oil, etc. from all types of masonry, concrete, mortar and grout



Item Number	Package Size	Metric	Quantity
8601-14	1 qt. bottle	0.95 L	12/case
8601-01	1 gal. bottle	3.8 L	4/case

Concrete Sealer

Highly water resistant clear coating that protects and seals concrete surfaces. Also promotes proper curing by retaining water in freshly placed concrete.

Use For:

- Curing new concrete for a stronger and more durable finish
- Sealing concrete surfaces against water, salt, grease, etc.



Item Number	Package Size	Metric	Quantity
8800-00	1 gal. bottle	3.8 L	4/case
8800-01	5 gal. pail	18.9 L	36/pallet

Concrete Accelerator

Add to concrete mix for faster set time. Use one to two boxes of accelerator per 60lb (27.2kg) bag of concrete mix.

Use For:

- Fences and lamp posts
- Basketball backboards
- Swing sets
- Piers
- Curbs

* Available regionally



Item Number	Package Size	Metric	Quantity
9800-01	1.5 lb. carton	681g	24/case

Thermo-Lube®

Winter admixture provides thermal characteristics required for a faster set and increased early strength. Reduces the time that the fresh concrete or mortar needs to be protected from freezing. Keeps concrete and masonry work moving.

Use In:

- Concrete and mortar in cold weather



Item Number	Package Size	Metric	Quantity
1905-01	1 gal. bottle	3.8 L	4/case
1905-05	5 gal. pail	18.9 L	36/pallet

SANDS & AGGREGATES



Premium Play Sand

Specially graded washed sand that has been dried and screened.

Use For:

- Children's sand boxes
- Molding and building



Item Number	Package Size	Metric	Quantity
1113-51	50lb. bag	22.7 kg	56/pallet

All-Purpose Sand

Washed, properly graded coarse sand with multi-purpose uses. Meets ASTM C 33 specifications.

Use For:

- Underlayment for brick pavers and flagstone
- Increasing traction on snow and ice
- Mixing with potting soil or for use in other garden applications
- Mixing with portland cement and gravel to make concrete mix



Item Number	Package Size	Metric	Quantity
1152-51	50lb. bag	22.7 kg	56/pallet
1152-70	70lb. bag	31.7 kg	42/pallet

Patio Paver Base Sand

Underlayment base sand used to provide a firm, stable base. For interlocking pavers, flagstone, brick and patio block.

Use For:

- Patios
- Walkways
- Driveways



Item Number	Package Size	Metric	Quantity
1150-49	50lb. bag	22.7 kg	56/pallet

Patio Paver Jointing Sand

Properly graded fine sand for filling joints between interlocking pavers, flagstone, brick and patio block.

Use For:

- Patios
- Walkways
- Driveways



Item Number	Package Size	Metric	Quantity
1151-59	50lb. bag	22.7 kg	56/pallet

Pool Filter Sand

Properly graded clean silica sand.

Use For:

- Swimming pool filtration systems



Item Number	Package Size	Metric	Quantity
1153-50	50lb. bag	22.7 kg	56/pallet

Traction Sand

Ideal for traction on all surfaces in icy conditions.

Use For:

- Icy and snow-covered surfaces
- Added vehicle weight



Item Number	Package Size	Metric	Quantity
1158-50	50lb. bag	22.7 kg	56/pallet

SANDS & AGGREGATES



Commercial Grade Sand

Consistently graded, washed and kiln dried sand used for industrial and construction applications.

Use For:

- Underlayment for patios/walks
- Landscaping
- Epoxy systems & industrial coatings
- Specialized cement mixtures



Item Number	Package Size	Metric	Quantity
1961-52	50lb. bag	22.7 kg	56/pallet
1961-02	100lb. bag	45.4 kg	35/pallet
1962-51	50lb. bag	22.7 kg	56/pallet
1962-01	100lb. bag	45.4 kg	35/pallet
1963-03	50lb. bag	22.7 kg	56/pallet
1963-01	100lb. bag	45.4 kg	35/pallet

All-Purpose Gravel

Multi-use product for a variety of decorative and landscaping applications. Also for making concrete. Washed, properly graded gravel conforming to ASTM C 33 specifications.

Use For:

- Landscaping, gardening, patios, tree wells, walks, rooftops, fish ponds and aquariums
- Mix with portland cement and all purpose sand to make concrete



Item Number	Package Size	Metric	Quantity
1151-50	50lb. bag	22.7 kg	56/pallet

Tubesand

Tube-shaped bag fits along side rear axle, above wheel wells or in bed of pick up trucks.

Use For:

- Traction and vehicle weight for winter driving conditions



Item Number	Package Size	Metric	Quantity
1159-60	60lb. bag	27.2 kg	42/pallet

Rock Salt

Use For:

- Melting ice and snow on stairs, sidewalks, driveways, etc.



Item Number	Package Size	Metric	Quantity
9002-25	25lb. bag	11.3 kg	100/pallet
9002-50	50lb. bag	22.7 kg	56/pallet
9002-80	80lb. bag	36.3 kg	42/pallet

Deco Pebbles

Use For:

- Landscaping around patios, decks, gardens, etc.



Item Number	Package Size	Metric	Quantity
9905-50	50lb. bag	22.7 kg	56/pallet

Marble Chips

Use For:

- Landscaping around patios, decks, gardens, etc.



Item Number	Package Size	Metric	Quantity
9906-50	50lb. bag	22.7 kg	56/pallet

BUILDING FORMS & MISCELLANEOUS



QUIK-Tube™ Building Form

Rigid fiber building form tube eliminates the need to build wood forms. Available regionally in 10' and 12' lengths.

Use For:

- Mailbox bases
- Deck supports
- Columns



Item Number	Package Size	Metric	Quantity
6922-01	8" x 4'	203mm x 1.2m	36/tray
6922-02	10" x 4'	254mm x 1.2m	24/tray
6922-03	12" x 4'	305mm x 1.2m	18/tray

Expansion Joint Strips

Expansion joint filler made from resilient cane fibers to prevent damage during expansion and contraction of concrete. Weather resistant. Meets requirements of ASTM D 1751.

Use:

- In driveways, sidewalks and patios
- Between concrete slabs and to separate slabs from structures



Item Number	Package Size	Metric	Quantity
6917-03	1/2" x 4" x 5'	12.7mm x 1.5m	40/carton
6917-04	1/2" x 4" x 10'	12.7mm x 3.0m	20/carton

Concrete & Mortar Mixer

Portable and reusable mixing container. Easy-to-use. No tools required.

Use For:

- Mixing perfect concrete or mortar in minutes




Item Number	Package Size	Quantity
6921-26	each	25/pallet

Walk Maker® Building Form-Country Stone Pattern

Reusable plastic mold in Cobblestone Pattern. Fill the mold with 80lbs. of Concrete Mix, trowel, and remove the mold. For best results, use QUIKRETE® Fiber-Reinforced Concrete.

Use For:

- Creating cobblestone patterned paths, patios, courtyards, etc.
- Add color to concrete mix with QUIKRETE® Liquid Cement Color. Available in Charcoal, Buff, Red, Brown, and Terra Cotta

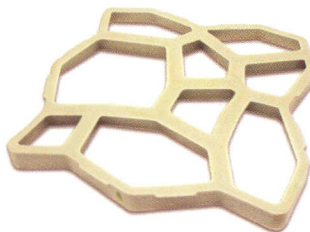

Item Number	Package Size	Quantity
6921-32	each	12/case

Walk Maker® Building Form-Running Bond Brick Pattern

Reusable plastic mold in running bond brick pattern. Fill the mold with 80lbs. of Concrete Mix, trowel, and remove the mold. For best results, use QUIKRETE® Fiber-Reinforced Concrete.

Use For:

- Creating brick-patterned walks, paths, patios, courtyards, etc.
- Add color to concrete mix with QUIKRETE® Liquid Cement Color. Available in Charcoal, Buff, Red, Brown, and Terra Cotta



Item Number	Package Size	Quantity
6921-33	each	12/case

BUILDING FORMS & MISCELLANEOUS




WalkMaker® Building Form- European Block Pattern


Reusable plastic mold featuring pattern of squares and rectangles in various sizes. Fill the mold with 80 lbs. of concrete, trowel and remove the mold. For best results, use QUIKRETE® Fiber-Reinforced Concrete.

Use For:

- Creating block-patterned walks, paths, patios, courtyards, etc.
- Add color to concrete mix with QUIKRETE® Liquid Cement Color. Available in Charcoal, Buff, Red, Brown, and Terra Cotta

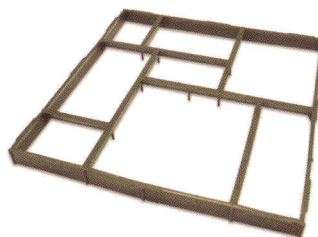

Item Number	Package Size	Quantity
6921-34	each	12/case

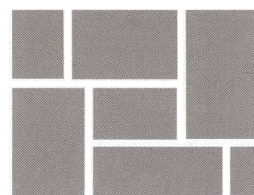


WalkMaker® Building Form- Basket Weave Brick Pattern

Reusable plastic mold in basket weave brick pattern. Fill the mold with 80 lbs. of concrete, trowel and remove the mold. For best results, use QUIKRETE® Fiber-Reinforced Concrete.

Use For:

- Creating brick-patterned walks, paths, patios, courtyards, etc.
- Add color to concrete mix with QUIKRETE® Liquid Cement Color. Available in Charcoal, Buff, Red, Brown, and Terra Cotta

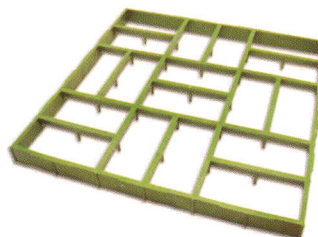

Item Number	Package Size	Quantity
6921-35	each	12/case

BLACKTOP PRODUCTS



Commercial Grade Permanent Blacktop Repair

High performance asphalt cold patch specially formulated for permanent repairs to potholes and cracks over 1" (25mm) wide in asphalt pavement. DOT Approved formula. Stays pliable in cold weather applications.

- Use all year round in wet or dry conditions
- Can be used in hot or cold weather
- Provides superior bond strength
- Does not require heating or mixing, pour directly out of bag
- Can be formed and compacted
- Patched area is ready for immediate use



Item Number	Package Size	Metric	Quantity
1701-62	60lb. bag	27.2 kg	56/pallet

Blacktop Patch

Asphalt cold patch for repairing potholes and large cracks in asphalt pavement.

- Does not require heating or mixing, pour directly out of bag
- Can be formed and compacted
- Patched area is ready for immediate use



Item Number	Package Size	Metric	Quantity
1701-60	60lb. bag	27.2kg	56/pallet

Blacktop Crack Seal

A self-leveling, latex formula specially designed to fill and seal cracks in blacktop up to 1/2" (12mm) wide. Ready-to-use. Just pour from the bottle. Blends with the surrounding blacktop surface.

Use For:

- Repairing cracks in asphalt and blacktop surfaces



Item Number	Package Size	Metric	Quantity
8640-05	1 qt. bottle	.095 L	12/case

Blacktop Repair

A weather-resistant crack-filler, provides excellent adhesion and minimal shrinkage. Helps prevent water and ice damage to blacktop surfaces. Dries to a textured black finish. Non-flammable.

Use For:

- Repairing cracks in blacktop and asphalt surfaces including driveways, roofs and chimney flashings



Item Number	Package Size	Metric	Quantity
8630-10	10 oz. bottle	296 ml	12/case

Blacktop Repair Tube

A sanded acrylic latex formula that is weather resistant and remains flexible. Adheres to asphalt and concrete.


Use For:

- Filling and sealing cracks in blacktop surfaces



Item Number	Package Size	Metric	Quantity
8630-05	5.5 oz. tube	163 ml	12/case

TILE SETTING PRODUCTS

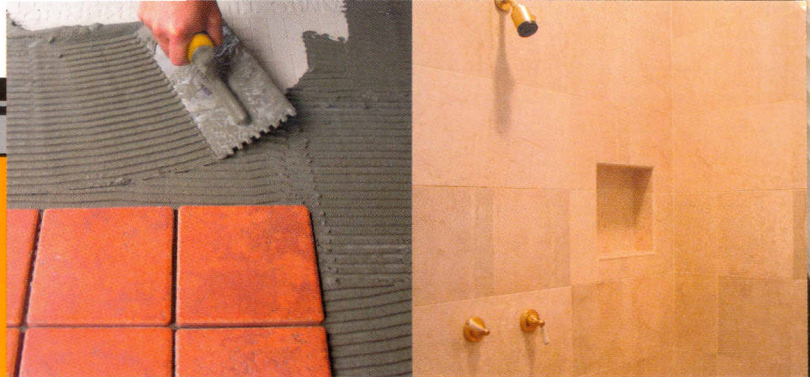

Thin Set Sanded

Portland cement based thin set for setting absorptive and non-absorptive tile on walls and floors. Complies with ANSI A 118-1. Addition of Acrylic Fortifier is recommended.

Apply over:

- Concrete
- Concrete block
- Wall board
- Cementitious backer board
- Portland cement plaster



Item Number	Package Size	Metric	Quantity
1547-50	50lb bag	22.7 kg	63/pallet

Thin Set Sanded-White

Portland cement based thin set for setting absorptive and non-absorptive tile on walls and floors. Complies with ANSI A 118-1. Addition of Acrylic Fortifier is recommended.

Apply over:

- Concrete
- Concrete block
- Wall board
- Cementitious backer board
- Portland cement plaster



Item Number	Package Size	Metric	Quantity
1547-51	50lb bag	22.7 kg	63/pallet

Thin Set Multi-Purpose

Polymer modified, portland cement based thin set used for setting ceramic tile and natural stone such as marble or granite, and saltillo tile on walls and floors. Complies with ANSI A 118-1 and ANSI A 118.4. Requires no additional latex or fortifiers. Available in gray and white.

Apply over:

- Plywood
- Concrete
- Concrete block
- Cementitious backer units
- Wall board
- Portland cement plaster



Item Number	Package Size	Metric	Quantity
1550-50	50lb bag White	22.7 kg	63/pallet
1550-49	50lb bag Gray	22.7 kg	63/pallet

HOLT LUMBER COMPANY

EVERYTHING TO BUILD WITH
www.holtlumberonline.com
 Phone 570-282-4400